



Essential Facts

- 2 signal processing channels
- 3 preconfigured sound profiles

Hardware

- 13 battery
- Rocker switch

Speech


- Feedback Preventer (Standard Functionality)

STF P T1


Data Sheet

<http://www.am-hearing.com>

STF P T1 · Technical Data

Type	Earhook undamped	
		
	2 ccm coupler	Ear simulator
Output sound pressure level		
at 1.6 kHz	–	132 dB SPL
Peak	130 dB SPL	136 dB SPL
HFA-OSPL 90	125 dB SPL	–
Gain		
Full-on gain (FOG) at 1.6 kHz	–	59 dB
Full-on gain (Peak)	62 dB	71 dB
HFA-FOG	58 dB	–
Reference test gain	48 dB	52 dB
Frequency, noise and directivity		
Frequency range	110-6000 Hz	170-6700 Hz
Equivalent input noise	24 dB SPL	24 dB SPL
Total harmonic distortion at 500 / 800 / 1600 Hz	3 / 2 / 1 %	4 / 4 / 1 %
Broadband tinnitus function	–	–
AI-DI	–	
Inductive coil sensitivity		
MASL (1 mA/m) at 1.6 kHz	–	–
HFA MASL (1 mA/m)	–	–
HFA SPLITS (left/right)	–	–
RSETS (left/right)	–	–
Battery		
Battery voltage	1.3 V	
Battery current drain	1.1 mA	
Battery life (cell zinc air)	~200 h	
Battery life (rechargeable)	–	
IRIL IEC 118-13:2011 (bystander)		
800-960 MHz	<-35 dB SPL	
1400-2000 MHz	<-24 dB SPL	
ANSI C63.19	M3	


STF P T1 · Fitting Range

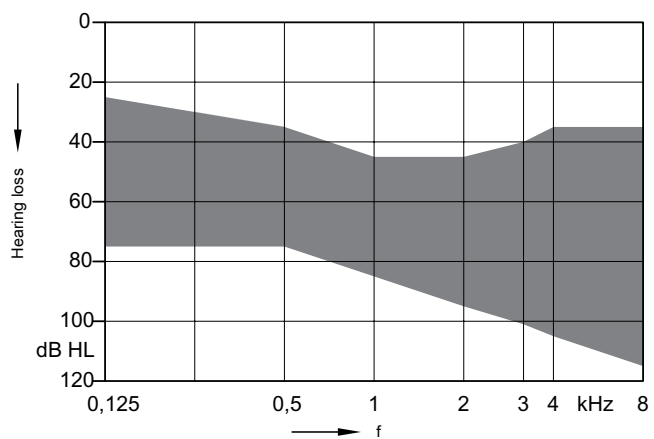

Earhook undamped

STF P T1 (Earhook undamped) · Basic Data


2 ccm coupler

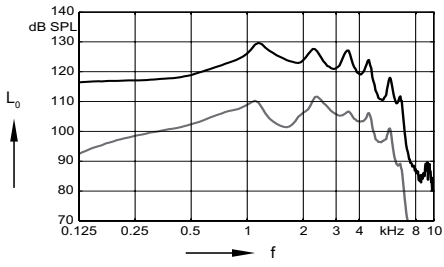

Output sound pressure level
($L_1 = 90$ dB)


Full on gain
($L_1 = 50$ dB)

Ear simulator

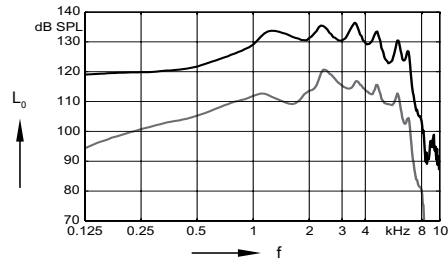


Output sound pressure level
($L_1 = 90$ dB)

Full on gain
($L_1 = 50$ dB)

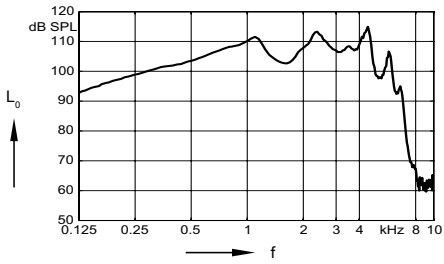


Frequency response
($L_1 = 60$ dB)

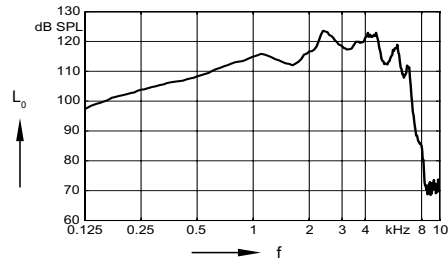

Basic acoustic response
($L_1 = 60$ dB)

Sound profiles and channels

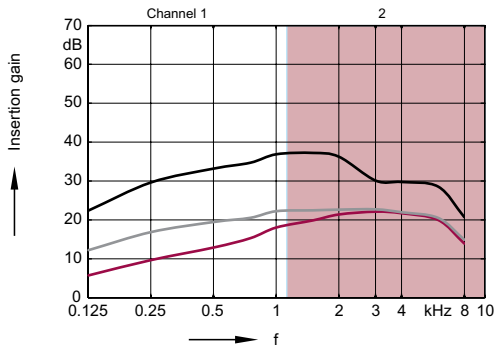

Preconfigured sound profiles

— — —

STF P T1

Abbreviations and Standards

Abbreviations

The following abbreviations are used in this datasheet:

OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full-On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

Standards

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2009 and IEC 60118-7:2005 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1 and to DIN 45605 (frequency range) if applicable.
- ▶ Tinnitus function measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.
- ▶ The following ear pieces were used:
 - Earhook

Sound Profile System

The Sound Profile System is a new and innovative way of adjusting hearing instruments for the client's individual hearing loss whilst providing optimal speech comfort. All Sound Profiles are engineered and fine-tuned for optimal speech understanding, sound quality and feedback stability.

The Sound Profile System is based on the analysis of 18,000 hearing losses. Depending on the performance level of the product, it will offer 3, 4 or 6 preconfigured Sound Profiles for each hearing instrument model. Each preconfigured Sound Profile covers a range of typical hearing losses and differs in gain, compression and MPO settings.

Studies have shown that for hearing instruments in this segment, the Sound Profile System was preferred over conventional fittings.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice.

The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

WARNING

Choking hazard posed by small parts.

- ▶ This instrument is not intended for the fitting of infants, children under 3 years and persons of mental incapacity.

WARNING

Instrument has an output sound pressure level of 132 dB SPL or more. Risk of impairing the residual hearing of the user.

- ▶ Take special care when fitting this instrument.