


GREAT SOUND

ReSound Veas® is known and appreciated for providing great sound – thanks to advanced audiological features. Its feedback management system eliminates feedback, even in challenging situations. Without sacrificing gain. Sophisticated noise reduction keeps sound clear. And Adaptive Directionality with Integrated Wind Noise Management™ and SoftSwitching™ provides outdoor comfort and speech understanding in noise.



iSolate™ nanotech

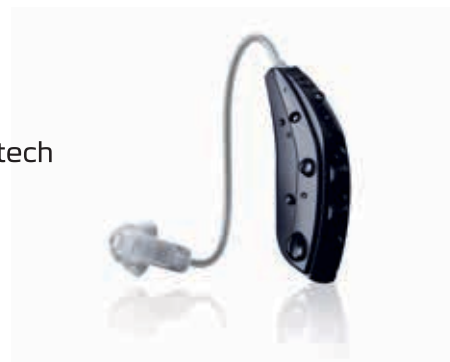

COSMETIC, DURABLE DESIGN

ReSound Veas is available in a selection of small, good-looking models – including a great-looking new RIE that sits discreetly on the ear. And iSolate™ nanotech coating shields the housing and each component of ReSound Veas, inside and out. Moisture rolls right off. And ReSound Veas stays out of the repair shop and on your patients' ears.

FIT AND GO

Advanced technology. Simple to fit. Easy to use. With Aventa, AutoFit and SpeedLink, you can fit patients comfortably, properly and quickly. And in-situ audiometry lets you obtain an accurate audiogram anywhere – without a sound booth. ReSound Veas brings you closer than ever to “fit-and-go.”



FLEXIBLE OPTIONS

One product family. Nine models including RIE, BTE and custom devices. Three technology levels. A wide fitting range. That's our formula for flexibility. You can fit practically every hearing loss and satisfy every preference. And ReSound Veas is powerful enough to keep up with your patients' evolving amplification needs.



ReSound

rediscover hearing

ReSound® helps people rediscover hearing. We develop hearing solutions that emulate the function of the natural ear to let people forget their hearing loss and enabling them to live a rich, active and fulfilling life. ReSound Veas® is no exception.

gnresound.com/vea

ReSound North America

8001 Bloomington Freeway
Bloomington, MN 55420
1-800-248-4327
customerexperience@gnresound.com
gnresound.com

ReSound Government Services

8001 Bloomington Freeway
Bloomington, MN 55420
1-800-392-9932
VAinfo@gnresound.com

ReSound Canada

303 Supertest Road
Toronto, Ontario M3J 2M4
1-888-737-6863
gnresound.ca

ReSound Veas®

Extended line-up
of models



ReSound

rediscover hearing




Looks as good as it sounds

ReSound Veas® offers great sound quality in an array of attractive models – including a discreet and modern RIE – that people feel good about wearing. They'll be satisfied – at a price they can afford.

Technical specifications

		VE62* NP/HP		VE77*		VE88*	VE60*		VE70		VE80	VE10		VE30		VE50			
		Open	Classic	Open	Classic	Classic	Open	Classic	Open	Classic	Classic	Standard	Power	Standard	Power	Standard	Power		
Reference test gain (60 dB SPL input)	1600 Hz/HFA	38/45	39/45	42	46	53	33	44	38	48	55	28	35	35	41	39	48	dB	
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	58/69 49/57	62/69 50/57	61 53	66 55	74 65	57 45	63 55	58 47	69 60	75 67	44 39	52 46	52 46	60 54	62 52	66 58	dB	
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	124/127 117/120	125/128 116/120	130 127	134 129	139 132	130 116	133 128	130 117	133 127	140 135	121 114	125 120	122 117	127 121	126 119	136 135	dB SPL	
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	1.1/1.2 1.3/2.4 1.0/0.9	1.2/1.1 1.4/2.4 1.1/0.8	0.3 0.3 0.6	0.5 0.8 0.7	2.4 0.9 1.4	1.7 0.6 0.6	3.0 1.9 0.4	0.3 0.3 0.4	1.4 1.6 0.7	1.4 0.5 0.9	0.8 0.7	0.6 0.3	0.5 0.4	1.1 0.7	1.2 1.0	0.7 0.1	%	
Telecoil sensitivity (1 mA/m input) Full-on telecoil sensitivity @ 1mA/m	Max. 1600 Hz / HFA	89/99 80/88	92/99 81/88	92 83	95 85	104 94	87 77	94 86	85 76	97 88	105 98				84 78	90 84	91 83	97 90	dB SPL
Equivalent input noise w/o noise reduction 1/3 octave equivalent input noise, w/o noise reduction	1600 Hz	24/24 12/11	24/24 12/11	24 11	25 10	23 10	28 15	27 14	30 14	29 15	27 12	25 12	23 11	24 11	22 9	27 12	25 13	dB SPL	
Frequency range (DIN 45605)		190-6940/130-7170	100-6880/100-7170	100-6690	100-7060	100-6700	100-6710	100-6590	100-6060	130-6420	100-6710	100-6890	100-6930	100-7150	100-7160	100-7160	100-5130	Hz	
Current drain (in test mode)		1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3	1.3	1.2	1.1	1.2	1.2	1.2	1.2	mA	

* VE60, VE62, VE77 and VE88 are available in ReSound Veas 3 only

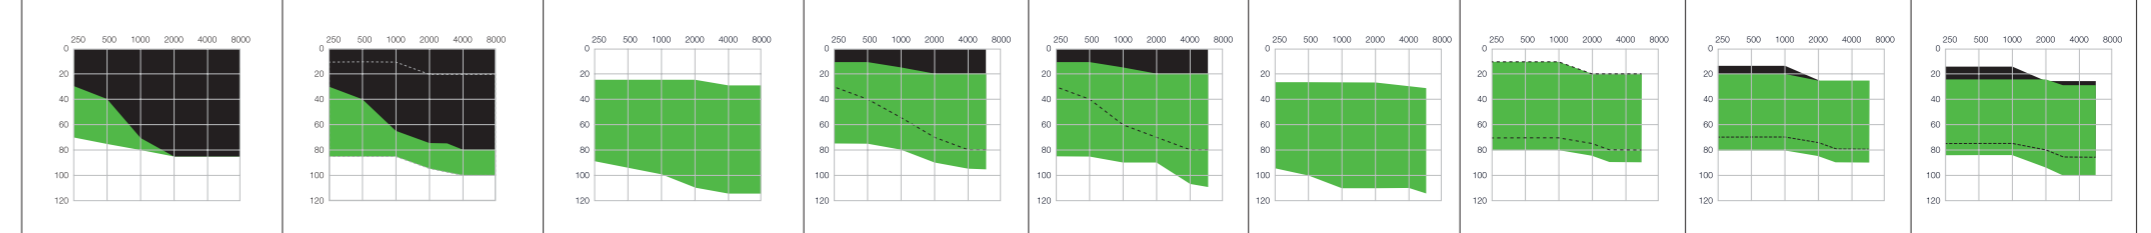

Key features

		ReSound Veas® 3	ReSound Veas® 2
Sound Quality	WARP™ compression - number of bands	7	6
	Dual Stabilizer™ II DFS with Whistle Control	●	●
Performance in noise	Adaptive Directionality with Integrated Wind Noise Management™	●	
	SoftSwitching™	●	
	Fixed Directionality*	●	●
	Noise Tracker™ II	●	●
Ease of use	Telecoil	●	●
	Direct Audio Input (DAI)	●	●
	Datalogging	●	●
Flexible fitting	Gain handles	6	4
	Fully flexible programs/total**	2/4	2/3
	In-situ Audiometry***	●	●
	SmartStart™	●	●
Protection	PhoneNow™	●	●
	iSolate™ nanotech	●	●



Behind-the-Ear Receiver-in-Ear




Completely-in-Canal

ReSound Veas® BTE and RIE colors



ReSound Veas® custom color

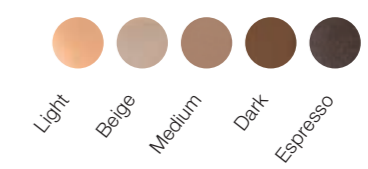

*Not available in VE10 **Only 1 fully flexible program in VE10 ***Available in RIE and BTEs only