Phonak Audéo™ B **Product information**

Phonak Audéo B is the comprehensive RIC portfolio for mild to severe hearing losses. Phonak Audéo B includes six designs, three external receivers and four performance levels, including a noise generator for tinnitus management. Powered by the innovative technology of the Phonak Belong platform, Phonak Audéo B hearing aids are the ideal solution for those clients that prefer best hearing performance in flexible and discreet RIC housings.

For more information visit www.phonakpro.com



Product description

| Troduct desci | ription | | | | | | | • |
|---------------------------------|------------------------------|-------------------------------|-------------------------------|---|---|-------------------------------|--|---|
| | | | Audéo B-10 B90/B70/B50/B30 | Audéo B-312 B90/B70/B50/B30 | Audéo B-312T B90/B70/B50/B30 | Audéo B-13 B90/B70/B50/B30 | Audéo B-Direct B90/B70/B50 | Audéo B-R B90/B70/B50 |
| Battery size | | | 10 | 312 | 312 | 13 | 13 | |
| Push button (Program/Volume) | | | • | • | • | • | • | • |
| Volume control | | | | - | | • | | - |
| Telecoil | | | | | • | • | | |
| EasyPhone | | | • | • | • | • | | • |
| Bluetooth® | | | | | | | • | |
| Nano coating | | | • | • | • | • | • | • |
| IP rating | | | IP681 | IP681 | IP681 | IP681 | IP681 | IP681 |
| Dimensions | LxWxD | | | 26.6 x 10.8 x 6.9 mm (1.05 x 0.43 x 0.27") | 28.7 x 12.3 x 6.8 mm (1.13 x 0.48 x 0.27") | | 27.2 x 10.9 x 7.3 mm (1.07 x 0.43 x 0.3") | 29.7 x 12.9 x 7.9 mm (1.17 x 0.51 x 0.31") |
| | Weight | | 1.0 g (0.04 oz) | 1.3 g (0.05 oz) | 1.5 g (0.05 oz) | 2.2 g (0.08 oz) | 1.2 g (0.04 oz) | 2.4 g (0.09 oz) |
| Battery life ² | No audio/media streaming | | | | | | | 24 h |
| | 5 h of audio/media streaming | | | | | | | 20 h |
| | 10 h of audio/media steaming | | | | | | | 16 h |
| Charging times ³ | 0% to 100% | | | | | | | 3 h |
| | 0% to 80% | | | | | | | 1.5 h |
| | 30 min. fitting | | | | | | | 10 min. |
| Standard xReceiver (xS) | | | | | | | | |
| Max. Power Output (dB SPL) | | 2 cc coupler | 111 | 111 | 111 | 111 | 111 | 111 |
| . (15) | | Ear simulator | 122 | 122 | 122 | 122 | 122 | 122 |
| Max. gain (dB) | | 2 cc coupler | 46 | 46 | 46 | 46 | 46 | 46 |
| | (11.) | Ear simulator | 56 | 56 | 56 | 56 | 56 | 56 |
| Frequency range – Ear simulator | (HZ) | | <100 - 9200 | <100 - 9200 | <100 - 9200 | <100 - 9200 | <100 - 9200 | <100 - 9200 |
| Working current (mA) | | | 1.2 | 1.2 | 1.2 | 1.2 | 1.8 | |
| Power xReceiver (xP) | <u> </u> | 2 | 104 | 104 | 104 | | 104 | 104 |
| Maximum Power Output (dB SPL) | | 2 cc coupler | 124 | 124 | 124 | 124 | 124 | 124 |
| Max gain (dR) | | Ear simulator 2 cc coupler | 132 57 | . — 132 57 | 132 | 57 | 57 | - - 132 - 57 |
| Max. gain (dB) | | Ear simulator | 65 | 65 | 65 | 65 | 65 | 65 |
| Frequency range – Ear simulator | (H ₇) | | <100 - 6400 | <100 - 6400 | <100 - 6400 | <100 - 6400 | <100 - 6400 | <100 - 6400 |
| Working current (mA) | (112) | | 1.2 | 1.2 | 1.2 | 1.2 | 1.8 | |
| | | | 1.2 | 1.2 | 1.2 | 1.2 | 1.0 | |
| UltraPower xReceiver (xUP) | | | | | | | | |
| Max. Power Output (dB SPL) | | 2 cc coupler | | 130 | 130 | 130 | 130 | 130 |
| | | Ear simulator | | 136 | 136 | 136 | 136 | 136 |
| Max. gain (dB) | | 2 cc coupler | | 66 | 66 | 66 | 66 | 66 |

Ear simulator

72

<100 - 5800

1.3

72

<100 - 5800

1.3

72

<100 - 5800

1.3

72

<100 - 5800

2.0

72

<100 - 5800

Frequency range - Ear simulator (Hz)

Working current (mA)

IP68 indicates that the hearing aid is water resistant and dust tight. It survived continuous immersion in 1 meter of water for 60 minutes and 8 hours in a dust chamber as per the IEC60529 standard. No traces of dust were evident within the housing.
Actual battery life also depends on hearing loss, battery age and sound environment.
Actual charge time depends on the remaining battery life, but it will not exceed 3 hours.

Housing colors













Chestnut



Champagne



Silver Gray



Graphite Gray



Velvet Black








Beige

Acoustic coupling

| | | | Standard xReceiver | Power xReceiver | UltraPower xReceiver |
|--------------------|--------------------------|--|--------------------|-----------------|----------------------|
| Length | Available in fou | r different lengths (0, 1, 2, 3), left and right | • | • | • |
| Dome | Open dome | Available in three sizes (S, M, L) | • | • | |
| | Closed dome | Available in three sizes (S, M, L) | • | • | |
| | Power dome | Available in three sizes (S, M, L) | • | • | |
| SlimTip* | Hard material | Hollow shell | • | • | |
| | | Solid shell | • | | |
| cShell | Hard material | | • | • | • |
| *Available with ex | xtra canal length option | | dB | dB HL | dB HL |
| | | | | | |

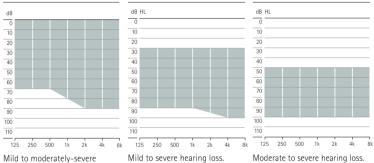

Phonak Audéo B-R charging options



Phonak Charger Case RIC

The Phonak Charger Case is a charger, drying kit and protective hard case all in one. Additionally, it includes a cleaning tool in the robust and splash-proof housing designed for two Audéo B-R hearing aids.



Phonak Power Pack

hearing loss.

For charging Phonak Audéo B-R on the go, the Phonak Power Pack can be easily attached to the bottom of the Phonak Charger Case. It provides power for 7 full charges of two Audèo B-R hearing aids.



Phonak Mini Charger RIC The Phonak Mini Charger is a compact charger for two Audéo B-R hearing aids.

Please refer to the technical data sheet for the Phonak Charger Case, Phonak Power Pack and Phonak Mini Charger for further information.

Phonak Audéo B-Direct Bluetooth® versions

Direct calls

Bluetooth® 4.2 wireless technology and most older Bluetooth phones

Phonak Remote App

iOS 10.2 or higher and Android 6.0 or higher

Fitting

| | Audéo B-10 B90/B70/B50/B30 | Audéo B-312 B90/B70/B50/B30 | Audéo B-312T B90/B70/B50/B30 | Audéo B-13 B90/B70/B50/B30 | Audéo B-Direct B90/B70/B50 | Audéo B-R B90/B70/B50 |
|-------------------|--------------------------------------|--------------------------------|---------------------------------|-------------------------------|-------------------------------|--------------------------|
| Phonak Target | 5.0 or higher | 5.0 or higher | 5.0 or higher | 5.0 or higher | 5.2 or higher | 5.0 or higher |
| iCube II | • | • | • | • | | • |
| Noahlink Wireless | | | | | • | |
| NOAHLink | | • | • | • | | |
| HI-PRO, HI-PRO2 | | • | • | • | | |

Wireless communication portfolio

| Wireless accessory | | Audéo B-10 B90/B70/B50/B30 | Audéo B-312 B90/B70/B50/B30 | Audéo B-312T B90/B70/B50/B30 | Audéo B-13 B90/B70/B50/B30 | Audéo B-Direct B90/B70/B50 | Audéo B-R B90/B70/B50 |
|--------------------|------------------------------|-------------------------------|--------------------------------|---------------------------------|-------------------------------|-------------------------------|--------------------------|
| 1 | Phonak CROS B-312 | • | • | • | • | | |
| (| Phonak CROS B-13 | • | • | • | • | | |
| 4 | Phonak DECT II | • | • | • | • | | • |
| • | Phonak PilotOne II | • | • | • | • | | • |
| 0 | EasyCall II | • | • | • | • | | • |
| | Phonak ComPilot II | • | • | • | • | | • |
| | Phonak ComPilot Air II | • | • | • | • | | • |
| | Phonak TVLink II | •1 | • 1 | •1 | •1 | | •1 |
| | Phonak RemoteMic | •1 | • 1 | •1 | •1 | | •1 |
| | TV Connector | | | | | • | |
| Roger | | | | | | | |
| - | Roger 18 | | | | • | | |
| 6 | Roger X / AS18 | | | | • | | |
| * | Roger X / Phonak ComPilot II | • | • | • | • | | • |
| | Roger MyLink | | | • | • | | |
| Apps | | | | | | | |
| | Phonak RemoteControl | • | • | • | • | | • |
| | Phonak Remote | | | | | • | |
| | | | | | | | |

For information on Roger microphones please visit www.phonakpro.com/roger

Performance levels

| | Premium B90 | Advanced B70 | Standard B50 | Essential B30* |
|-----------------------------------|----------------|-----------------|-----------------|-------------------|
| AutoSense OS | Premium | Advanced | Standard | Essential |
| Calm Situation | • | • | • | • |
| Speech in Noise | • | • | • | • |
| Comfort in Noise | • | • | • | |
| Music | • | • | | |
| Speech in Loud Noise ** | • | | | |
| Speech in Car | • | | | |
| Comfort in Echo | • | | | |
| Additional programs | | | | |
| Max. additional programs | 5 | 5 | 5 | 5 |
| Speech in Wind ** | • | | | |
| Comfort in Echo | • | | | |
| Speech in Loud Noise ** | • | • | | |
| Speech in 360° ** | • | • | | |
| Speech in Noise | • | • | • | • |
| Calm Situation | • | • | • | • |
| Comfort in Noise | • | • | • | • |
| Music | • | • | • | • |
| Acoustic phone | • | • | • | • |
| Custom program | • | • | • | • |
| Streaming programs | | | | |
| Audéo B-10, B-312, B-312T, B-13 a | nd B-R | | | |
| Max. streaming programs | 4 | 4 | 4 | 4 |
| Bluetooth audio + mic | • | • | • | • |
| Bluetooth phone / DECT + mic | • | • | • | • |
| RemoteMic / Roger | • | • | • | • |
| Audio jack | • | • | • | • |
| Audéo B-Direct | | | | |
| Max. streaming programs | 2 | 2 | 2 | 2 |
| TV Connector + mic | • | • | • | • |
| Phone + mic | • | • | • | • |

| Features | Premium B90 | Advanced B70 | Standard B50 | Essential B30* |
|---------------------------|----------------|-----------------|-----------------|-------------------|
| UltraZoom | Premium | Advanced | Standard | Essential |
| SNR-Boost | • | • | • | |
| FlexControl | • | • | • | |
| FlexVolume | • | • | • | |
| DuoPhone** | • | • | • | |
| SoundRecover2 | • | • | • | • |
| User Preference Tuning | • | • | • | • |
| Real Ear Sound | • | • | • | |
| Finetuning channels | 20 | 16 | 12 | 8 |
| WhistleBlock | • | • | • | • |
| NoiseBlock | • | • | • | • |
| WindBlock | • | • | | |
| EchoBlock | • | | | |
| SoundRelax | • | • | | |
| QuickSync | • | • | • | • |
| AOV | • | • | • | • |
| Tinnitus Balance | • | • | • | • |
| auto Acclimatization | • | • | • | • |
| Environmental balance *** | _ • | • | • | |

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

^{*} Not available for Phonak Audéo B-Direct and Audéo B-R ** Not available with Audéo B-Direct *** Only for Audéo B-Direct

Life is on

At Phonak, we believe that hearing well is essential to living life to the fullest. For more than 70 years, we have remained true to our mission by developing pioneering hearing solutions that change people's lives to thrive socially and emotionally. Life is on.

www.phonakpro.com



